



6-17/32" (166 mm)



# DRYER MOUNTING TEMPLATE

**Fix this card on the wall.**

Drill 4 holes

(A. B. C. D. 5/16" (8 mm) diameter: 1-3/8" (35 mm) depth.)

## CONNECT DESCRIPTION

1. Secure the base plate on the wall provided.
2. The conduit in place by suitable 1/2 inch trade conduit fitting.
3. Connections:
  - A. Connect the live wire colored red (or brown) to The terminal block where marked "L".
  - B. Connect the neutral wire colored black (or blue) To the terminal block where marked "N".
  - C. Connect the earth wire colored green and yellow (or green, note bare earth wires should be sleeved With green and yellow or green sleeving) to the Ground washer where marked with the earth symbol. ⊕


### Required Heights

Men's	43"
Ladies	41"
Children, ages 11-17	39"
Children, ages 3-10	33"
Handicapped	35"



Palmer Fixture Company  
 P.O. Box 10887  
 Green Bay, WI 54307  
 1-800-558-8678  
 www.palmerfixture.com

**39" (100 cm) from the ground is suitable**

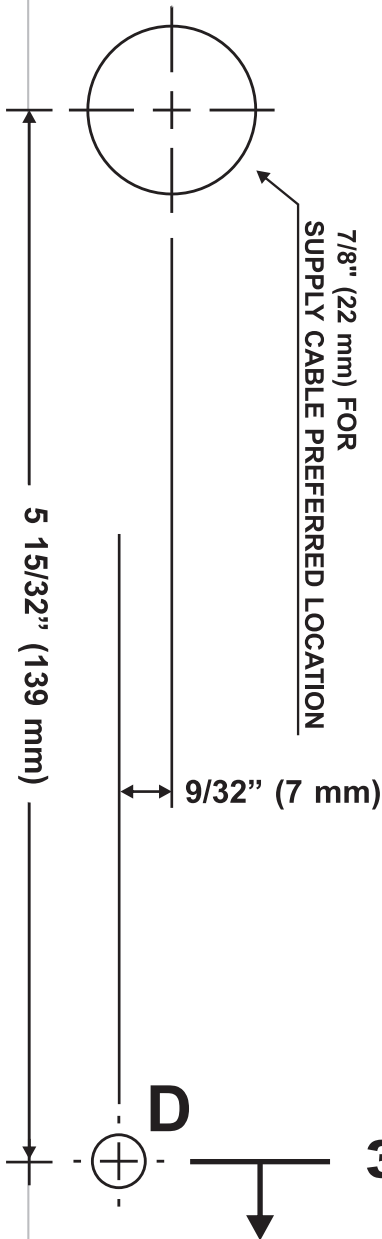

9-9/64" (232 mm)

